

**LUNA 42 HIGH OUTPUT NG & LP
ELECTRIC START
ADJUSTABLE FLAME**

Fire is beautiful and also dangerous if not handled properly. Please have a qualified gas fitter setup and install this product according to local codes.

This product has been tested and certified by Labtest Certification Inc. as being safe, as long as these **minimum clearances** to adjacent materials are maintained.

FOR OUTDOOR USE ONLY

UK & EUROPEAN SPECIFICATIONS

Gas type:	<u>Natural Gas</u>	<u>Propane/But.</u>
	G20	G30
Inlet press:	17.4 mbar	27.33 mbar
Manifold press:	6.22 mbar	11.19 mbar
Heat Output:	31.65 kW	31.65 kW
	108,000 BTU	108,000 BTU


Electrical: 230 Vac, 0.13A, 50/60Hz

BS EN 509:2001+ A1:2003 + A2:2004
BS EN 489:2012



CONCRETE SPECS

Strength: 10,000 psi (proprietary)
Weight: 310 lbs / 140 kg

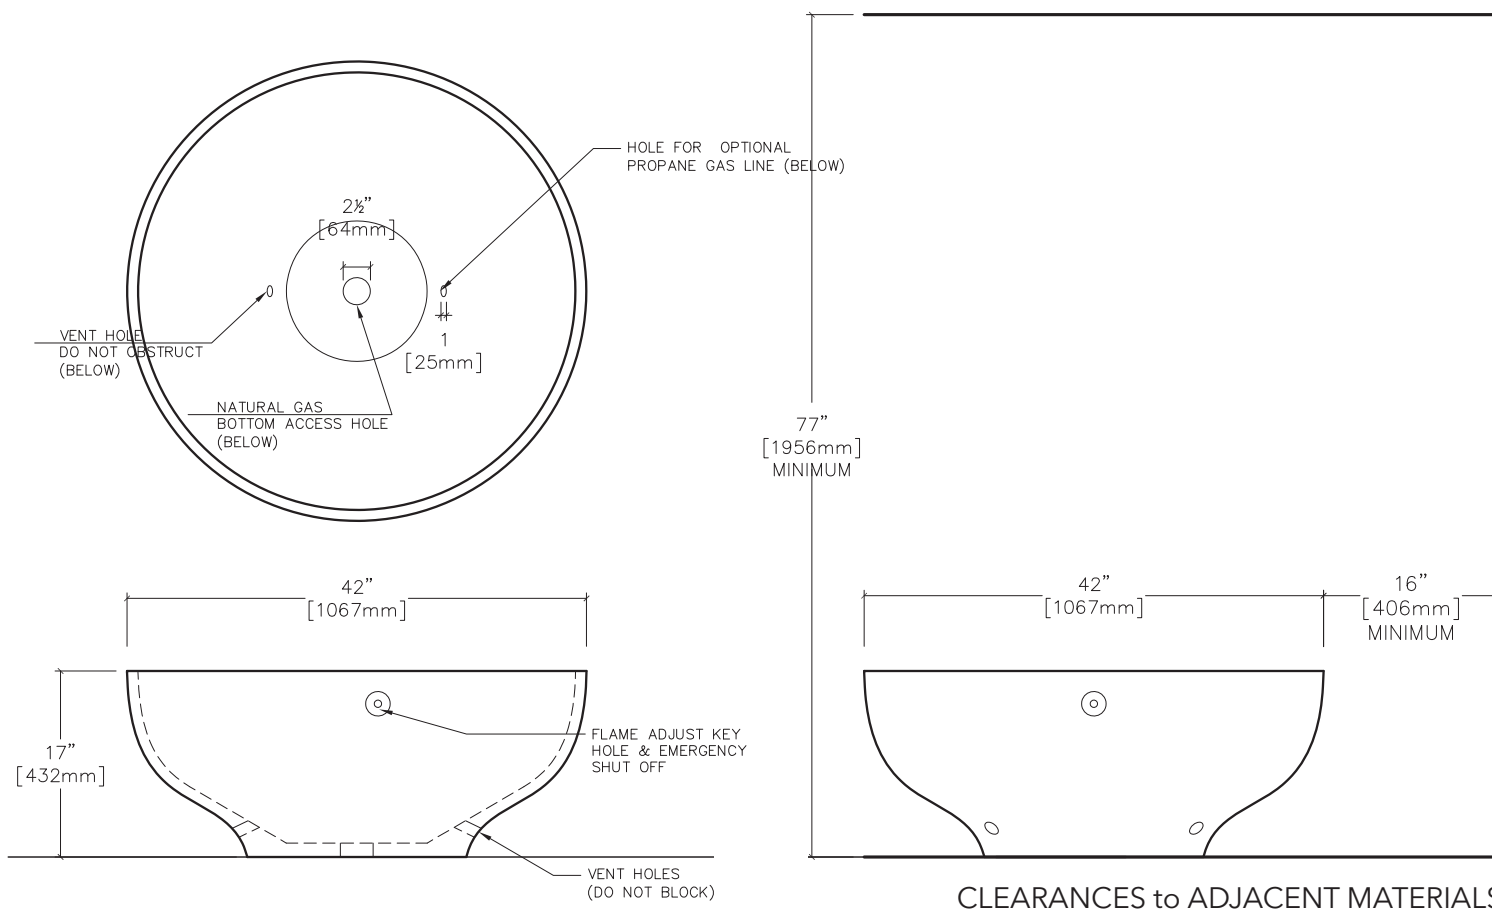

CLEARANCES to ADJACENT MATERIALS

NOTE:

The site Electrician must provide a switched electrical line to the firepit location.
SEE: *Electronic Ignition Set up Schematic.*

ACCESSORIES

- 1/ All Weather Fabric Cover /extends warranty.
- 2/ Clear Anodized Aluminum top / 1/4" plate with 5/8" supports / extends warranty
- 3/ Glass wind guard.

JOB / ORDER
Name or Number:

Signature & Date: