

LINEAR
ELECTRONIC START NG & LP
ADJUSTABLE FLAME

Fire is beautiful and also dangerous if not handled properly. Please have a qualified gas fitter setup and install this product according to local codes.

This product has been tested and certified by Labtest Certification Inc. as being safe, as long as these **minimum clearances** to adjacent materials are maintained.

FOR OUTDOOR USE ONLY




NORTH AMERICA SPECIFICATIONS

| | | |
|-----------------|--------------------|----------------|
| Gas type: | <u>Natural Gas</u> | <u>Propane</u> |
| Inlet press: | 7.0" w.c. | 11" w.c. |
| Manifold press: | 2.5" w.c. | 4.5" w.c. |
| Heat Output: | 108,000 BTU | 108,000 BTU |

Electrical: 120 Vac, 1.5A, 60Hz or 24Vac, 20VA

CONCRETE SPECS

Strength: 10,000 psi (proprietary)
Weight: 450 lbs / 136 kg =
(2 slabs @ 150 lbs / 68 kg)
(parts + lava & stones @ 150 lbs / 68 kg)

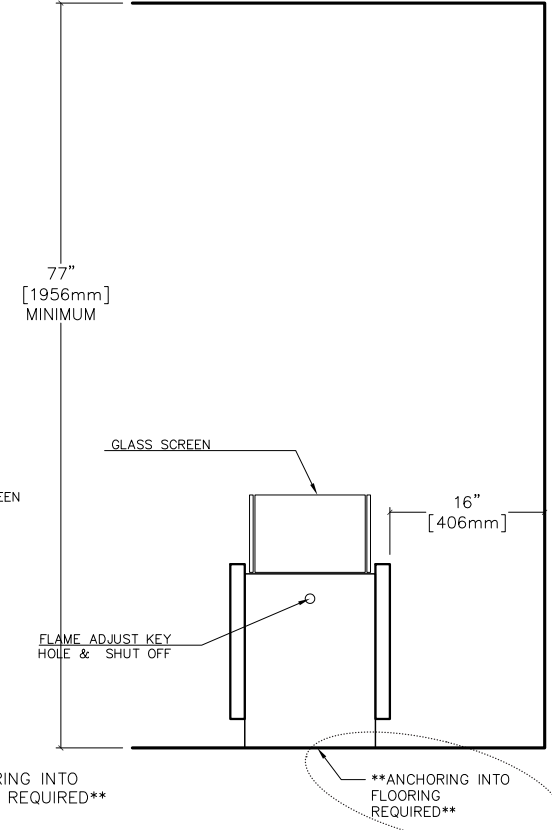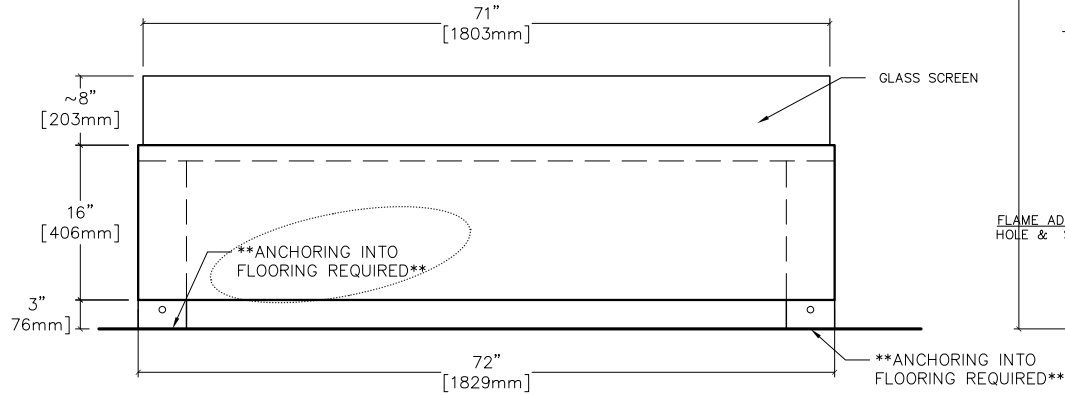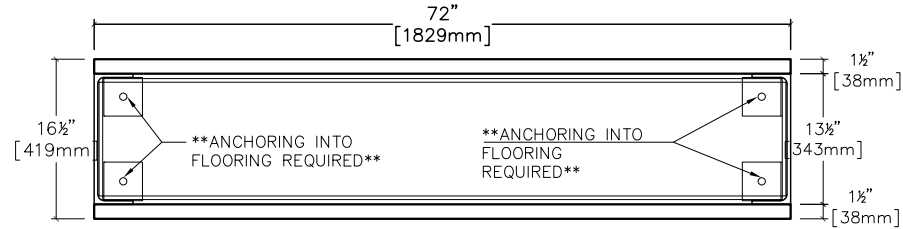

CLEARANCES to ADJACENT MATERIALS

NOTE:

The site Electrician must provide a switched electrical line to the firepit location.
SEE: *Electronic Ignition Set up Schematic*.

ACCESSORIES

1/ All Weather Fabric Cover /extends warranty.
2/ Glass wind guard (Included).

JOB / ORDER
Name or Number:

Signature & Date: