

# solus

Fire Features  
www.solusdecor.com

LINEAR - DOUBLE STACK NG & LP  
ELECTRONIC START  
ADJUSTABLE FLAME

Fire is beautiful and also dangerous if not handled properly. Please have a qualified gas fitter setup and install this product according to local codes.

This product has been tested and certified by Labtest Certification Inc. as being safe, as long as these **minimum clearances** to adjacent materials are maintained.

FOR OUTDOOR USE ONLY

## NORTH AMERICA SPECIFICATIONS

Gas type:	<u>Natural Gas</u>	<u>Propane</u>
Inlet press:	7.0" w.c.	11" w.c
Manifold press:	2.5" w.c.	4.5" w.c.
Heat Output:	108,000 BTU	108,000 BTU

Electrical: 120 Vac, 1.5A, 60Hz or 24Vac, 20VA


## UK & EUROPEAN SPECIFICATIONS

Gas type:	<u>Natural Gas</u>	<u>Propane/But.</u>
	G20	G31
Inlet press:	20 mbar	37 mbar
Manifold press:	16.39 mbar	30 mbar
Heat Output:	31.65 kW	31.65 kW

Electrical: 240 Vac, 50Hz

## CONCRETE SPECS

Strength: 10,000 psi (proprietary)  
Weight: 800 lbs / 363 kg =  
(4 slabs @ 150 lbs / 68 kg)  
(parts + lava & stones @ 200 lbs / 68 kg)

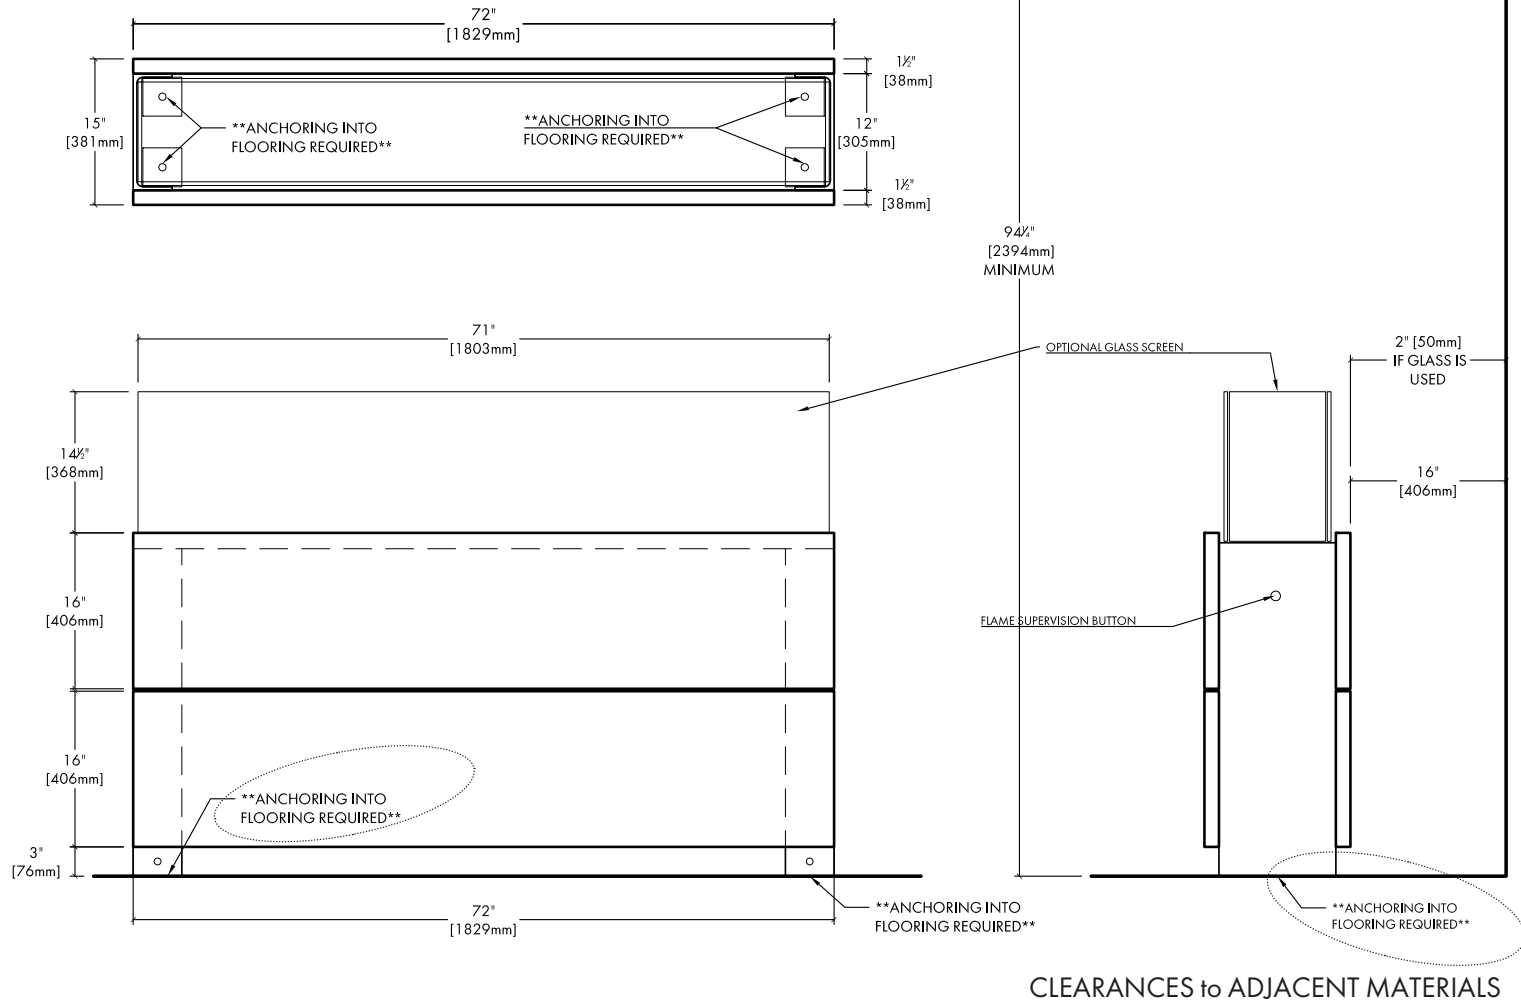

## NOTE:

The site Electrician must provide a switched electrical line to the firepit location.  
SEE: *Electronic Ignition Set up Schematic*.

## ACCESSORIES

1/ All Weather Fabric Cover /extends warranty.  
2/ Glass wind guard (Included).

JOB / ORDER

Name or Number:

Signature & Date: